
## **DUAL 4 INCH ROLLERS SIDE BY SIDE IN A MINIMUM CAVITY**

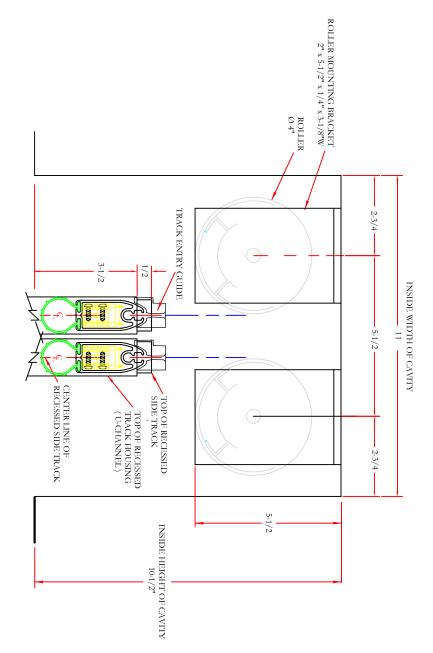

PLACEMENT OF 2 - 4" ROLLERS WITH RECESSED SIDE TRACK SIDE BY SIDE IN A CAVITY

- NOTE(S):

  1. DEPTH OF CAVITY BASED ON THE UNIVERSAL SLIDE BAR AND A 4 INCH BOTTOM SEAL.

  2. ALL DIMENSIONS ARE GIVEN IN INCHES.

  3. INSIDE CAVITY DIMENSIONS ARE THE SMALLEST THAT CAN BE USED TO ALLOW THE BOTTOM BEAD TO CLOSE UP INSIDE THE CAVITY SPACE. UNDER NO CIRCUMSTANCES ARE THE CAVITY SPACE. UNDER NO CIRCUMSTANCES ARE THE CAVITY SPACE.

	Approved By/Date:	Date: Appro	Creator:
Rev Date	Approved by Rev Date	Description of Revision	Rev#
01/16/19	N.D.R.	Rev 01 Addition of the Track Entry Guide	Rev 01
04/10/19	N.D.R.	Rev 02 Modify cavity dimensions	Rev 02

	1	1	
Creator:	Date:	Approved By/Date	ite:
N.D.R.	03/27/2014		
Drawing Title:			
<b>PSEXECSI</b>	PSEXECSIDEBYSIDEDUAL4INCHROLLERS01	#INCHROL	LERS01
			Scale:
© 2014 Ph	$\ensuremath{\mathbb{C}}$ 2014 Phantom Mfg. Intl Ltd		1:1