



PHANTOM
SCREENS

EXECUTIVE SCREEN PLANNER

5-1/2" HOUSING (4" Roller) and
7-1/8" HOUSING (5" Roller)

Client Name: _____
 Address: _____
 Home Ph. #: _____
 Fax #: _____
 Unit Location: _____

Installation Types
 Standard _____ Recessed _____
 Manual _____

A - IMPORTANT NOTE(s) Ref Maximum Mesh Pull Length:
 1. Maximum "Pull Length" for all Mesh Types is **16'** (192"). **EXCEPT:**
 2. The **Suntex 80** material is only available for a **11'** (132") "Pull Length" using a **4" Roller**
 is only available for a **12'** (144") "Pull Length" using a **5" Roller**

Mesh Type and Colour

"Insect" _____
 1814: _____ K _____ G _____ G 2020: _____ K _____ G _____ G

"Solar" _____
 2030: _____ K _____ G _____ G Sunscreen: _____ K _____ G _____ B Petscreen Lite: _____ K _____ K TSS1717: _____ K

"Premium Solar" _____
 ShearWeave 1000: _____ W _____ AW _____
 Suntex 80: _____ K _____ G _____ B _____ ST _____

"Privacy" _____
 MainStreet _____ K _____ G _____ DL _____
 SW 2360 _____ O _____ OB _____ E _____ PG _____ EPG _____ OPG _____ K _____ KG _____ KC _____
 ES7510: _____ K _____ K _____ KG _____ KZ _____

Unit Component Parts	Component Color
"Whole Unit"	W (White)
"Housing"	A (Almond) B (Brown) K (Black)
"Housing Cover"	G (Green) Gr (Gray)
"Slide Bar"	S (Sandalwood) D (Driftwood) Bz (Bronze)
"Side Track"	U (Unfinished)
"Track Cover"	L (Luxury) P (Premium) WG (Wood Grain)
"2 x 2"	Custom
"U-Channel"	
"Recess Track"	


Notes:
 U-Channel available in all Signature Colors

Controls	
No Controls Needed	67050 - 1 Ch Hz Dry Contact Interface
1 Ch Hand Held Remote (White)	67044 - 1 Ch Hand Held Remote (White)
1 Ch Hand Held Patio Remote (White)	67052 - 1 Ch Hand Held Patio Remote (White)
1 Ch In-Wall Remote DecoFlex (White)	67060 - 1 Ch In-Wall Remote DecoFlex (White)
1 Ch In-Wall Remote DecoFlex (Ivory)	67061 - 1 Ch In-Wall Remote DecoFlex (Ivory)
1 Ch In-Wall Remote DecoFlex (Black)	67068 - 1 Ch In-Wall Remote DecoFlex (Black)
1 Ch Wall Mount Remote (White)	97021 - 1 Ch Wall Mount Remote (White)
5 Ch Hand Held Remote (White)	67024 - 5 Ch Hand Held Remote (White)
5 Ch Hand Held Patio Remote (White)	67053 - 5 Ch Hand Held Patio Remote (White)
5 Ch In-Wall Remote DecoFlex (White)	67062 - 5 Ch In-Wall Remote DecoFlex (White)
5 Ch In-Wall Remote DecoFlex (Ivory)	67063 - 5 Ch In-Wall Remote DecoFlex (Ivory)
5 Ch In-Wall Remote DecoFlex (Black)	67069 - 5 Ch In-Wall Remote DecoFlex (Black)
16 Ch Universal RTS Interface	67059 - 16 Ch Universal RTS Interface
Hz Receiver	67045 - Hz Receiver
Chronis RTS Timer	67049 - Chronis RTS Timer
Eolis RTS Sensor (Wind)	67046 - Eolis RTS Sensor (Wind)
Solfis RTS Sensor (Sun and Wind)	67056 - Solfis RTS Sensor (Sun and Wind)
Solfis RTS Transmitter	67057 - Solfis RTS Transmitter
Hz Repeater	67067 - Hz Repeater
Suris, Wireless Sun Sensor	67066 - Suris, Wireless Sun Sensor
Digital Key Pad	67055 - Digital Key Pad
Power Cable 18' (for Hz D2+ only)	67064 - Power Cable 18' (for Hz D2+ only)
Key Fob 2 Channel	67065 - Key Fob 2 Channel
Key Fob 4 Channel	67065 - Key Fob 4 Channel

Housing Size (by Table)	Motor / Manual Gear Location
5-1/2"	Left _____ Right _____
7-1/8"	Left _____ Right _____

Mesh Join (Determined by Mesh Roll Width)	Mounting Angle
Yes _____ No _____	1" x 2" _____ 2" x 2" _____
Top (Default)	Punched (Standard) _____ Unpunched (Optional) _____
Bottom (Optional)	U-Channel _____ None _____
Location (in Inches) See IMPORTANT NOTE - D	

Bottom Seals	Note(s) - Available only in Grey
68020 - 1.3/4"	- If nothing indicated the 4" is automatically used.
68020 - 3.0"	
68015 - 4.0"	
68019 - 6.0"	

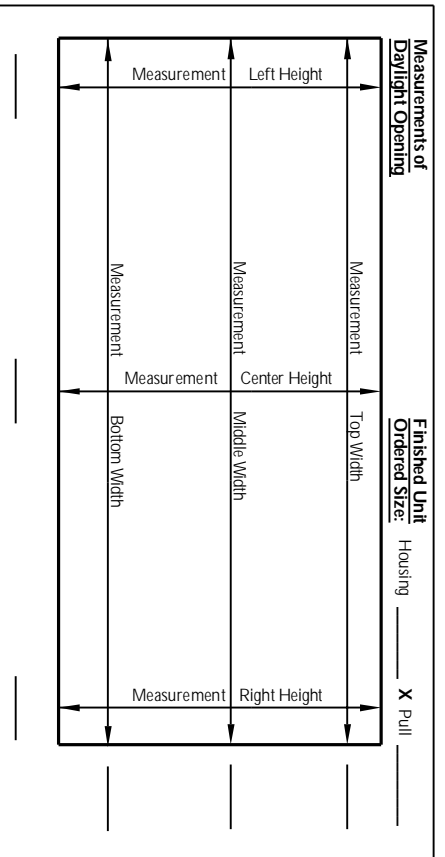

B - IMPORTANT NOTE(s) Ref Overall Unit Size:

- STANDARD (Surface) MOUNT: Width Opening (Daylight Opening) plus 4 inches. (Recommended).
- STANDARD (Inside) MOUNT: Width Opening (Daylight Opening) less 1/4 inches. (Recommended).
- MANUAL (Surface) MOUNT: Width Opening (Daylight Opening) plus 4 inches. (Recommended).
- MANUAL (Inside) MOUNT: Width Opening (Daylight Opening) less 1/4 inches. (Recommended).
- FINISHED PULL LENGTH: Standard Surface - Height Measurement (Daylight Opening) plus Housing Size. Recessed - Height Measurement (Daylight Opening) + Cavity Depth.

C - IMPORTANT NOTE(s) Ref Motor Placement:

- Always determine Motor / Manual Gear placement while viewing from the front of the Housing.
- The Motors **CANNOT** be placed within 18 inches of each other.
- The two Integrated Motors primarily used at this time: 525 - draws 1.6 amps / speed is 18 rpm. 535 - draws 2.1 amps / speed is 18 rpm.

D - IMPORTANT NOTE(s) Custom Mesh Join Calculations:

- When calculating the placement of an exact seam location, you must measure from the finished floor to the middle of the desired seam location. You must then minus the dimension of the slide bar and bottom seal you choose, to get your exact location. Refer to Phantom E-Syn Document # 00051.311.

Brush Pile Seal	Length of Manual Crank Handles
Front _____	24" _____ 59" _____
Back _____	None _____ 78.3/4" _____